


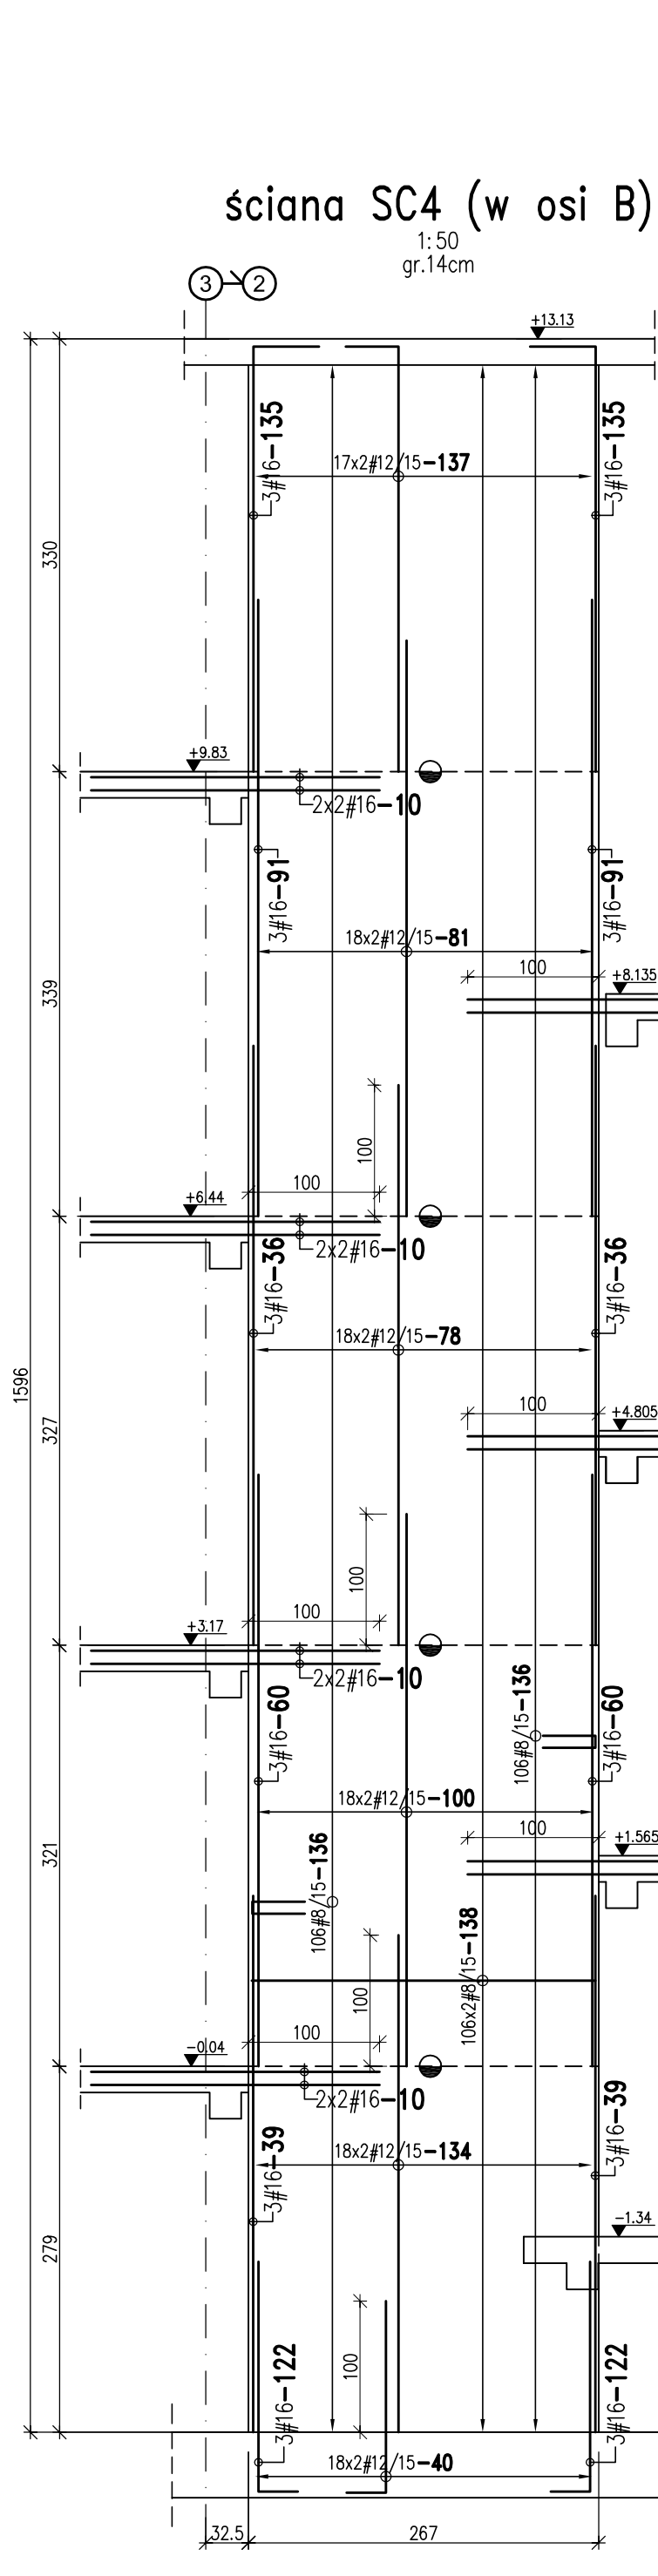

96		20	10	RESON	244	0.017	30.1
97		20	10	RESON	220	0.017	27.1
98		20	10	RESON	200	0.017	18.3
99		20	10	RESON	380	0.017	23.4
100		60	12	RESON	421	0.088	29.9
101		16	8	RESON	214	0.178	21.7
102		12	8	RESON	440	0.088	24.9
103		10	8	RESON	214	0.178	13.2
104		42	12	RESON	314	0.088	19.5
105		26	10	RESON	566	0.017	28.3
106		10	8	RESON	332	0.178	14.3
107		9	16	RESON	414	0.088	20.4
108		34	12	RESON	829	0.088	31.5
109		10	8	RESON	320	0.017	19.7
110		3	12	RESON	927	0.000	24.7
111		3	12	RESON	400	0.088	7.1
112		12	8	RESON	100	0.088	18.7
114		24	12	RESON	660	0.088	165.2
115		16	12	RESON	545	0.088	26.5
116		10	12	RESON	545	0.088	20.6
117		4	12	RESON	255	0.088	9.1
118		64	12	RESON	438	0.088	248.9
119		26	10	RESON	132	0.178	22.8
120		4	12	RESON	265	0.088	10.3
121		40	8	RESON	48	0.395	10.7
122		10	8	RESON	205	0.178	32.4
123		5	10	RESON	188	0.178	16.8
124		12	8	RESON	184	0.088	37
125		10	8	RESON	341	0.017	30.8
126		11	10	RESON	341	0.017	27.8
127		12	8	RESON	150	0.088	6.9
128		23	12	RESON	115	0.088	15.8
129		10	8	RESON	222	0.178	15.4
130		26	10	RESON	266	0.178	188.8
131		14	20	RESON	266	0.088	84.6
132		22	10	RESON	266	0.088	10.8
133		4	10	RESON	266	0.178	6.6
134		36	12	RESON	278	0.088	121.1
135		6	16	RESON	314	0.178	30.4
136		8	8	RESON	89	0.395	14.5
137		34	12	RESON	364	0.088	199.9
138		8	20	RESON	250	0.088	51.8
140		20	10	RESON	227	0.017	28
141		6	8	RESON	104	0.017	3.8
142		18	20	RESON	380	0.017	186.7
143		14	20	RESON	380	0.017	166.6
144		18	20	RESON	380	0.017	246.6
145		18	20	RESON	380	0.017	25.9
147		18	12	RESON	219	0.088	31
148		18	12	RESON	219	0.088	31
149		7	10	RESON	112	0.017	7.4
150		3	10	RESON	200	0.017	4.3
151		9	12	RESON	140	0.088	11.2
152		3	12	RESON	144	0.088	3.8
153		3	12	RESON	144	0.088	3.8
154		3	16	RESON	300	0.178	16.6
155		3	16	RESON	307	0.178	16.6
156		3	16	RESON	307	0.178	16.6
157		3	16	RESON	307	0.178	16.6
158		3	16	RESON	307	0.178	16.6
159		6	10	RESON	122	0.017	6.7
160		6	10	RESON	122	0.017	6.7
161		8	10	RESON	422	0.017	24.3
162		8	10	RESON	422	0.017	24.3
163		20	10	RESON	200	0.088	26.4
164		20	16	RESON	15	0.088	8.8
165		10	12	RESON	255	0.088	26.5
166		10	8	RESON	350	0.017	6.5
167		10	8	RESON	350	0.017	6.5
168		10	8	RESON	350	0.017	6.5
169		10	8	RESON	350	0.017	6.5
170		3	12	RESON	360	0.088	8
171		3	12	RESON	360	0.088	8
172		10	16	RESON	435	0.178	29.2
173		10	16	RESON	435	0.178	29.2
174		12	16	RESON	570	0.178	206.9
175		12	16	RESON	570	0.178	206.9
176		18	12	RESON	424	0.088	49.9
177		18	12	RESON	425	0.088	37.5
178		18	12	RESON	425	0.088	37.5
179		18	12	RESON	425	0.088	37.5
180		18	12	RESON	425	0.088	37.5
181		18	12	RESON	425	0.088	37.5
182		18	12	RESON	425	0.088	37.5
183		18	12	RESON	425	0.088	37.5
184		18	12	RESON	425	0.088	37.5
185		18	12	RESON	425	0.088	37.5
186		18	12	RESON	425	0.088	37.5
187		18	12	RESON	425	0.088	37.5
188		18	12	RESON	425	0.088	37.5
189		18	12	RESON	425	0.088	37.5
190		18	12	RESON	425	0.088	37.5
191		18	12	RESON	425	0.088	37.5
192		18	12	RESON	425	0.088	37.5
193		18	12	RESON	425	0.088	37.5
194		18	12	RESON	425	0.088	37.5
195		18	12	RESON	425	0.088	37.5
196		18	12	RESON	425	0.088	37.5
197		18	12	RESON	425	0.088	37.5
198		18	12	RESON	425	0.088	37.5
199		18	12	RESON	425	0.088	37.5
200		18	12	RESON	425	0.088	37.5
201		18	12	RESON	425	0.088	37.5
202		18	12	RESON	425	0.088	37.5
203		18	12	RESON	425	0.088	37.5
204		18	12	RESON	425	0.088	37.5

Technical drawing of a mechanical part showing dimensions and tolerances. The drawing includes a cross-section view with a circular feature labeled 'Ø 120h7/g6' and a circular feature labeled 'Ø 40'. The part has a total length of 120. The drawing also shows a section line 'A-A' and a dimension of 120. The part is labeled '120' and '120'.

[illegible]